


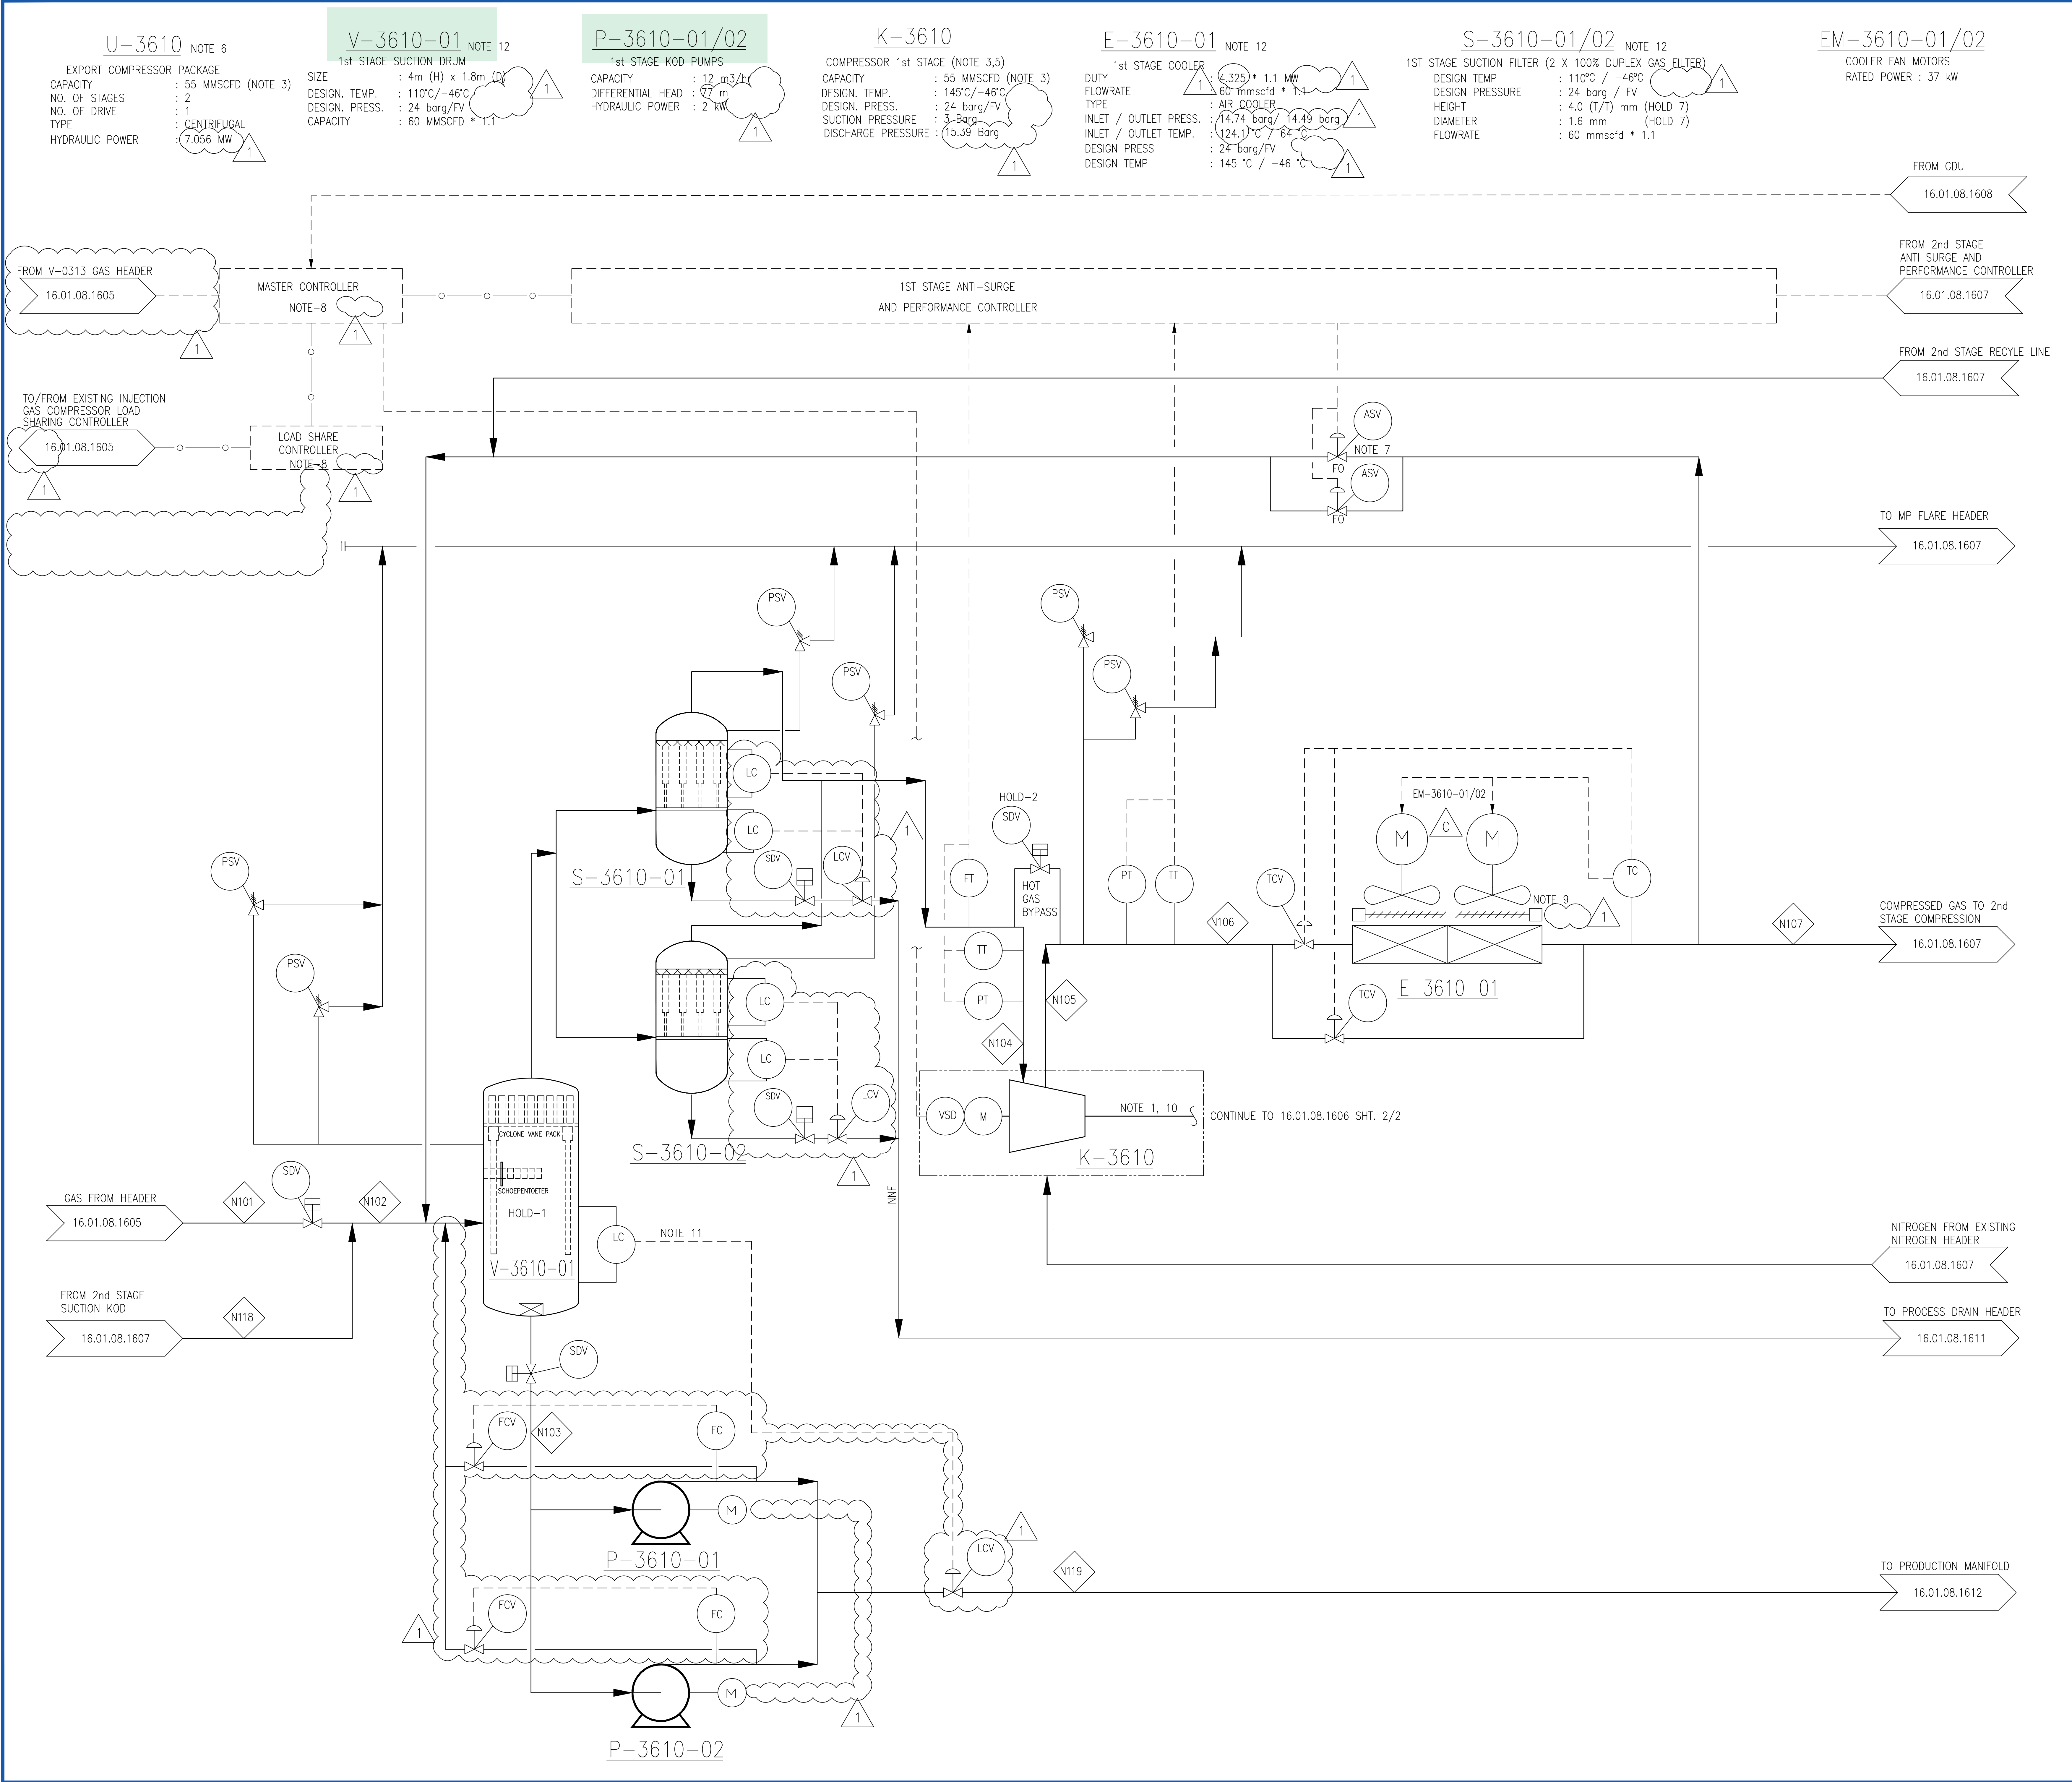

NOTES

- COMMON VARIABLE SPEED DRIVER FOR FIRST AND SECOND STAGES OF COMPRESSION.
- ALL EQUIPMENT AND INSTRUMENT TAG Nos. ON THIS DRAWING ARE PREFIXED BY AREA CODE (16) AND PLANT AREA CODE (01) UNLESS SPECIFIED OTHERWISE.
- COMPRESSOR ACHIEVABLE CAPACITY IS 60 MMSCFD WITHIN 105% SPEED.
- FOR STREAM DETAILS REFER HEAT AND MATERIAL BALANCE DOC NO. 30-99-91-1604
- EXPORT COMPRESSOR MINIMUM CAPACITY (TURNDOWN) SHOULD BE 7-17 MMSCFD DURING INITIAL YEARS.
- COMPRESSOR SHALL BE PROVIDED WITH LOW FLOW BUNDLE FOR LOW FLOW OPERATION DURING INITIAL YEAR AND HIGH FLOW BUNDLE FOR OPERATION AFTER YEAR 2029. LOWER CAPACITY BUNDLE CAPACITY RANGE FROM MIN 17MMSCFD TO MAX 26/29MMSCFD AT MCS (ZERO RECYCLE) FOR INITIAL YEAR 2029. HIGHER RATED CAPACITY BUNDLE, CAPACITY RANGE FROM MIN 29/40MMSCFD TO MAX 60MMSCFD WITHIN, 105% SPEED
- 2 X 100% ANTI SURGE VALVE SHALL BE PROVIDED. (TO BE SUPPLIED BY COMPRESSOR PACKAGE VENDOR).
- LOAD SHARING CONTROL WILL BE PROVIDED BETWEEN EXPORT GAS COMPRESSOR AND EXISTING GAS INJECTION TRAIN TO LOAD THEM EQUIDISTANT FROM SURGE CONTROL LINE WHILE OPERATING IN PARALLEL MODE. THE MASTER CONTROLLER SHALL ALSO BE ABLE TO ACCOMMODATE FUTURE GAS LIFT COMPRESSOR AND GAS INJECTION COMPRESSOR. INSTRUMENTS CONNECTED TO ANTSURGE CONTROL AND MASTER CONTROLLER ARE PART OF COMPRESSOR VENDOR PACKAGE (TO BE SUPPLIED BY COMPRESSOR PACKAGE VENDOR).
- IN ORDER TO AVOID FREQUENT START/STOP VFD FOR 50% OF THE FAN IS CONSIDERED.
- LR & HP STAGES ARE ON SAME SHAFT MOTOR
- 1ST STAGE SUCTION KOD PUMP P-3610-01 SHALL BE IN CONTINUOUS OPERATION. STANDBY PUMP P-3610-02 SHALL START IN CASE DUTY PUMP P-3610-01 FAIL TO START.
- EQUIPMENT SHALL ALSO BE DESIGNED FOR 16.3 BARG @ 130° C FOR EXPORT GAS COMPRESSOR COOLER FAILURE CASE.

HOLDS

- VESSEL INTERNAL.
- REQUIREMENT OF HOT GAS BY-PASS VALVE TO BE CONFIRMED AFTER DYNAMIC SIMULATION. IF REQUIRED, SAME SHALL BE PROVIDED BY COMPRESSOR VENDOR.
- DELETED.
- DELETED.
- DELETED.
- DELETED.
- VESSEL DIMENSION
- DELETED.
- DELETED.
- DELETED.
- DELETED.
- DELETED.

REFERENCE DRAWINGS

TITLE	DRG. No.
P&ID LEGEND SHEET	P16093.30.99.08.1601 SHT.1 TO 16
PFD PRODUCTION SEPARATORS	P16093.16.01.08.1605
PFD EXPORT GAS COMPRESSION SYSTEM 2nd STAGE	P16093.16.01.08.1607
PFD EXPORT GAS DEHYDRATION PACKAGE	P16093.16.01.08.1608
PFD PRODUCTION MANIFOLD	P16093.16.01.08.1612

LEGEND

REVISION CLOUD FOR PROJECT NO. P16093

THIS DRAWING IS NEWLY PREPARED FOR THIS PROJECT NO. P16093

REV.	DATE	DR'N.	CH'D.	AP'D.	DESCRIPTION
1	31/05/2024	SYK	ABS	SHA	ISSUED FOR CONSTRUCTION WITH HOLD
C	19/03/2024	SYK	ABS	SHA	ISSUED FOR APPROVAL
B	08/02/2024	SYK	ABS	MEB	RE-ISSUED FOR REVIEW
A	12/01/2024	SYK	ABS	MEB	ISSUED FOR REVIEW

SCALE: NTS LOCATION: SAHIL PROJECT No. P16093

أدنوك البرية
ADNOC Onshore

CONSULTANT / CONTRACTOR / VENDOR

AREJLERS **TARGET**

DRAWING No.

PROJECT: EPC OF SAHIL PHASE 3 DEVELOPMENT PROJECT

DRG. TITLE:

PROCESS FLOW DIAGRAM
GAS EXPORT COMPRESSION SYSTEM
1st STAGE K-3610 CDS : SAHIL

DRG.No.	AREA	P/AREA	DOC. CODE	SERIAL No.	REV.	SHT	OF	SHT
1601081606				1		1	1	1